


Keystone Jack

CAT5E/CAT6 FTP

Description:

- For 22-26AWG stranded and solid wire
- Meet TIA/ EIA-568A and TIA/ EIA-568B CAT5E/ CAT6 Requirements
- Labels for T568A and T568B wiring standards
- Gold-plated contacts
- Good impact resistance
- High and low temperature resistance
- Stable transmission

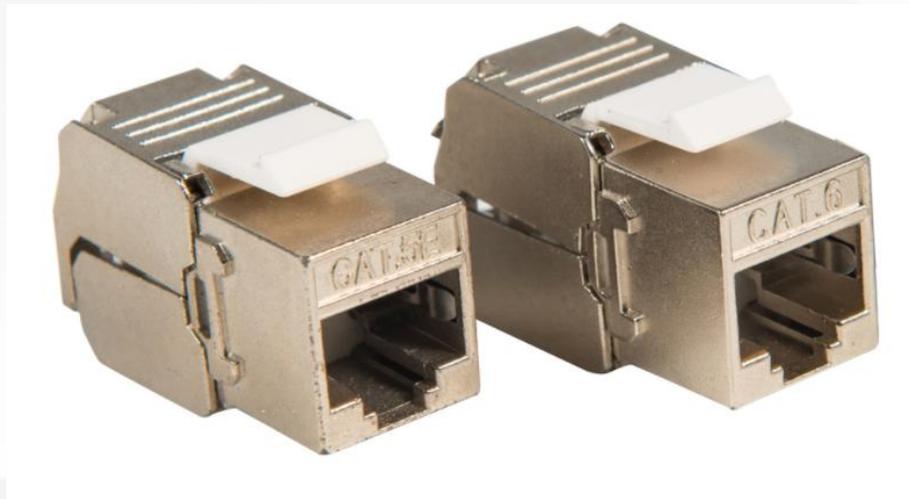

Product name	180° FTP Keystone Jack
Available Category	CAT5E and CAT6 FTP
Shielded	Yes
Package	100pcs/box
Material	- Shielded: Zinc Alloy - RJ45 Housing: PC - RJ45 Contact material and finished: Phosphor Bronze with 50-60 micro-inh Nickel plated Contact area: 3 micro-inch gold plating - IDC house: PC - IDC terminal material and finishing: phosphor bronze with 50 micro-inch tin-lead plated; over 50-60 micro inch nikel plating - PCB: FR4 UL94VO
Cable Scheme	T568A/B
IDC Accept	22-26AWG Cable
Color	White
Retention strength	7.7kgs between jack and plug
Insertion force	900 grms for 8 contacts
Durability	Jack: 750 cycles plug-jack mating and unmating test IDC: max 200 punching times
Operating temperature	-40~+70 ° C